


低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves



使用電磁換向閥型式
USE SOLENOID OPERATED
DIRECTIONAL VALVES

AHD-G02-2B3A AHD-G02-2B2
AHD-G02-2B3B AHD-G02-3C2
AHD-G02-2B2B AHD-G02-3C3

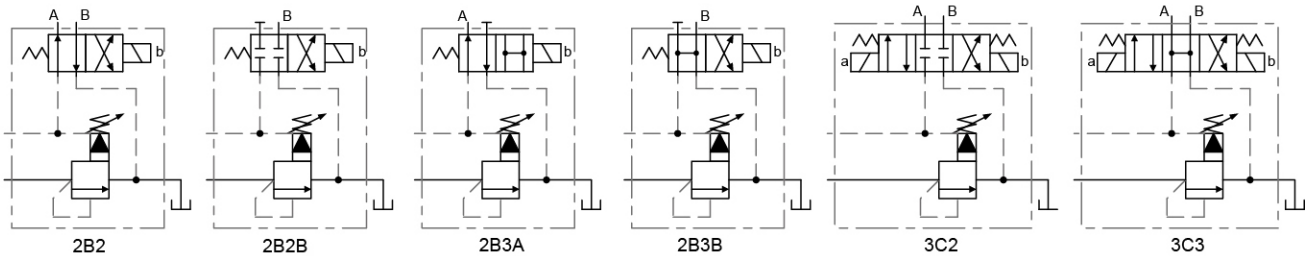

選購指南 HOW TO ORDER

SBSG	03	B	L	10
系列編號 SERIES NUMBER	閥口徑 VALVE SIZE	壓力調整範圍 PRESSURE ADJ. RANGE MPa (kgf/cm ²)	調整把手方向 HANDLE DIRECTION	設計號 DESIGN NUMBER
SBSG (座墊型) Sub-plated Type	- 03 : 3/8"	- B : 0.7 (7) - 7 (70)	- L (回油口 T Port) (標準型 Standard Type) - R (壓力口 P Port)	- 10 (標準型) Standard Type
	- 06 : 3/4"	- C : 1.4 (14) - 14 (140)		
	- 10 : 1-1/4"	- H : 3.5 (35) - 21 (210)		

規格說明 SPECIFICATIONS




型式 Model Series	最高使用壓力 Max. Operated Pressure MPa (kgf/cm ²)	最大流量 Max. Flow (L/min)	重量 Weight (kg)
SBSG-03	21 (210)	100	4.7
SBSG-06		200	5.7
SBSG-10		400	11.5

安裝螺絲 MOUNTING BOLTS

型式 Model Series	安裝螺絲 Mounting Cap Screw
SBSG-03	M 12 X 40 L 4pcs
SBSG-06	M 16 X 50 L 4pcs
SBSG-10	M 20 X 65 L 4pcs

低噪聲型電磁控制溢流閥 Low Noise Type Solenoid Controlled Relief Valves

● SBSG-03/06/10

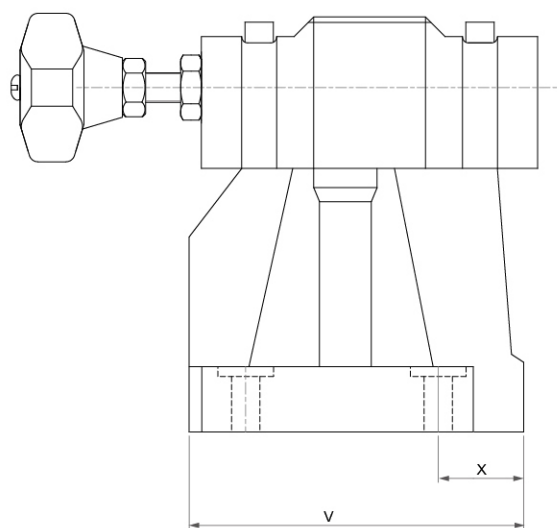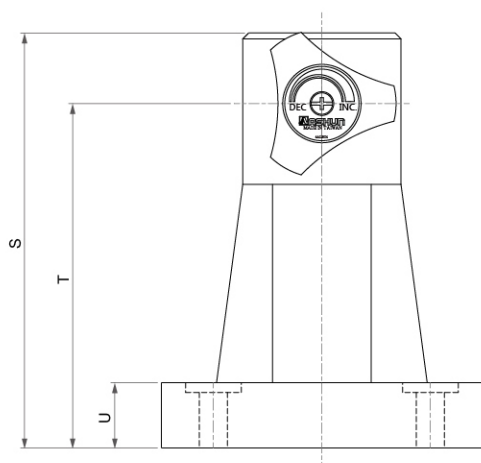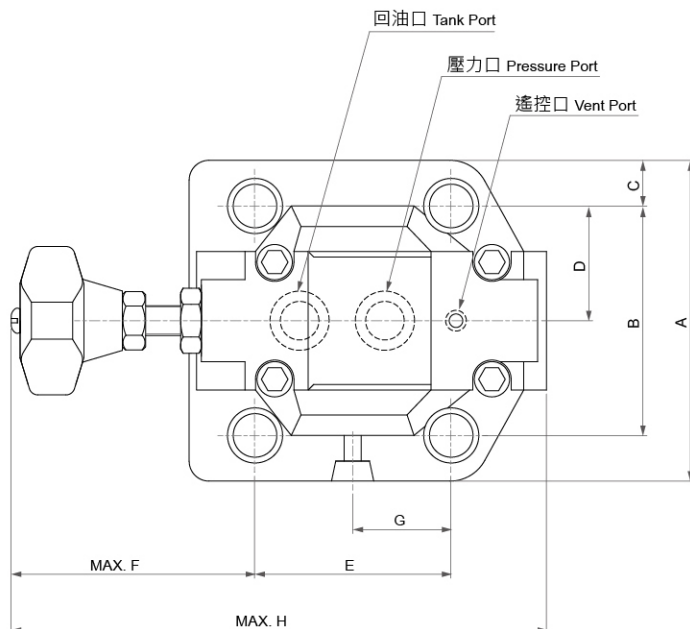

■ 尺寸說明 SPECIFICATIONS

型式 Model Series	A	B	C	D	E	F	G	H	S	T	U	V	X
SBSG-03	77	53.8	11.1	26.9	53.8	113.5	27	171	132	104	24	106	14
SBSG-06	99	70	17	35	66.7	98.8	33.7	171	132	104	30	132	14
SBSG-10	126	82	22.5	41	90	89	46	219	148	120	37	152	22